



HYDAC Technology Corporation

2260 City Line Road,

Bethlehem, PA 18017


TOLL FREE: [877-GO-HYDAC \(464-9322\)](tel:877-GO-HYDAC)

Website: www.hydac-na.com

VMF-VR: Low Pressure / Return Type J: Electrical Switch

Early warning pressure devices protect the hydraulic circuit from contamination, alerting the operator that the filter element is near capacity and must be changed. The clogging indicator is typically set to trip at 1-bar (14 psid) below the filter bypass setting, to allow the operator sufficient time for element change-out. Available in visual, combo electrical/visual, as well as an extensive list of other options and certifications. A comprehensive offering of clogging indicators ensures that

[+ more](#)

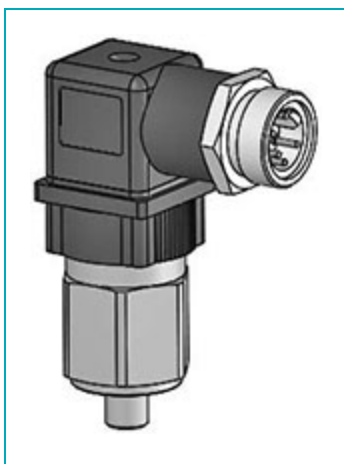

1

Part Number	Model Code Description	Type of Indication	Trip Pressure / Range	Thread	Medium	Maximum Torque
2079111	VMF2J.1	Electrical Switch	2 bar 29 psi	G 1/8	Mineral Oil or Water Based Fluids	11 lb·ft 15 N·m
2077170	VMF2J4.1	Electrical Switch	2 bar 29 psi	G 1/8	Mineral Oil or Water Based Fluids	11 lb·ft 15 N·m

Part Number	Model Code Description	Type of Indication	Trip Pressure / Range	Thread	Medium	Maximum Torque
<u>2701876</u>	VMF2J4.1/3	Electrical Switch	2 bar 29 psi	G 1/8	Mineral Oil or Water Based Fluids	11 lb·ft 15 N·m
<u>2073055</u>	VR2J4.1	Electrical Switch	2 bar 29 psi	G 1/2	Mineral Oil or Water Based Fluids	22 lb·ft 30 N·m
<u>2099122</u>	VR5J4.1	Electrical Switch	5 bar 72 psi	G 1/2	Mineral Oil or Water Based Fluids	22 lb·ft 30 N·m